



SURFACE-MOUNTED LUMINAIRES




Surface-mounted ceiling luminaires (indoor)




WA-906A
P.291



WA-906B
P.291



WA-906C
P.292




WA-906D
P.292




WA-933A
P.292




WA-933B
P.292



CL-T5H114
P.295



CL-T5H121
P.295



CL-T5H128
P.295



CL-T5H135
P.296



CL-T5S114
P.296



CL-T5S121
P.296



CL-T5S128
P.297



CL-T5S135
P.297



HDL-5600
P.298



HDLE-5600
P.298



HDLE-5600
P.298



HDL-5601
P.299



HDLE-5601
P.299



HDLE-5601
P.299



621411
P.300




621511
P.300



621611
P.300



621711
P.300



651A11
P.301



621911
P.301



621811
P.301



WA-616R
P.303



WG-984AR
P.304



WA-982R
P.305



WA-983R
P.305



WA-984R
P.305



HPT-T5 Series
P.306



HPT-T5D Series
P.307

Surface-mounted luminaires



Features

Simplified and clean-cut style.
Eco-friendly LED technology along with energy efficiency and free maintenance.
With 40° cut-off angle create a visual comfort efficiently.
No UV or IR radiation in the light beam.

Application

General lighting or guide for museums, exhibitions, art galleries, offices, residence and also in commercial applications.




Lamps	Lighting Dimension/Icon/Photometric Curve	parameters
		Housing: aluminium, powder-coated, anti-dazzle design. Lampshade: acrylic, matt lacquer, cut-off angle 40°, with patent technology, transmittance efficiency up to 95%. Input: AC 100V-240V LED: OSRAM 3Wx6(700mA) LED color: <input type="checkbox"/> CW <input type="checkbox"/> NW <input type="checkbox"/> WW Color: <input type="checkbox"/> WH <input type="checkbox"/> BK <input type="checkbox"/> SV

WA-906A-GP-3-90



		Housing: aluminium, powder-coated, anti-dazzle design. Lampshade: acrylic, matt lacquer, cut-off angle 40°, with patent technology, transmittance efficiency up to 95%. Input: AC 100V-240V LED: OSRAM 3Wx6(700mA) LED color: <input type="checkbox"/> CW <input type="checkbox"/> NW <input type="checkbox"/> WW Color: <input type="checkbox"/> WH <input type="checkbox"/> BK <input type="checkbox"/> SV
--	--	---

WA-906B-GP-3-90

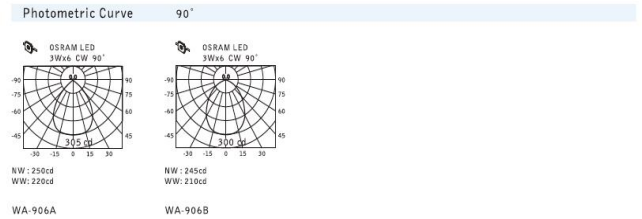



Surface-mounted luminaires

Lamps Lighting Dimension/Icon/Photometric Curve parameters






Housing: aluminium, powder-coated, anti-dazzle design.
Lampshade: acrylic, matt lacquer, cut-off angle 40°, with patent technology, transmittance efficiency up to 95%.
Input: AC 100V-240V
LED: OSRAM 3Wx6(700mA)
LED color: CW NW WW
Color: WH BK SV






WA-906C-GP-3-90

Lamps Lighting Dimension/Icon/Photometric Curve parameters






Housing: aluminium, powder-coated.
Lampholder: aluminium, anodized, with patent thermal management, 0°-30° tilt.
Input: AC 100V-240V
LED: OSRAM 1.2Wx9(350mA)
LED color: CW NW WW
Color: WH BK SV






WA-933A-GP-1-15

Lamps Lighting Dimension/Icon/Photometric Curve parameters






Housing: aluminium, powder-coated, anti-dazzle design.
Lampshade: acrylic, matt lacquer, cut-off angle 40°, with patent technology, transmittance efficiency up to 95%.
Input: AC 100V-240V
LED: OSRAM 3Wx6(700mA)
LED color: CW NW WW
Color: WH BK SV






WA-906D-GP-3-90

Lamps Lighting Dimension/Icon/Photometric Curve parameters





Housing: aluminium, powder-coated, aluminium, anodized, with patent thermal management, 0°-30° tilt.
Input: AC 100V-240V
LED: OSRAM 1.2Wx9(350mA)
LED color: CW NW WW
Color: WH BK SV

WA-933B-GP-1-15

Photometric Curve 90°




NW: 250cd
WW: 210cd

WA-906C

NW: 240cd
WW: 205cd

WA-906D

Photometric Curve 15° 24° 35°

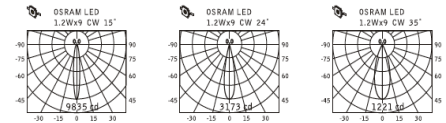

NW: 786cd
WW: 685cd

NW: 253cd
WW: 281cd

NW: 978cd
WW: 1013cd

WA-933A

WA-933B

WA-933C