



RECESSED WALL LUMINAIRES



Recessed wall luminaires (Indoor)



DA-E11R
P.257



LDL-C01
P.259



SCOOP90
P.259



LDL-E01
P.259



LDL-E02
P.260



LDL-E03
P.260



DL-A01
P.261



DL-B01
P.261



DL-C01
P.261



DL-D01
P.262



DL-E01
P.262



DL-E02
P.262



DL-E03
P.263



DA-E04
P.267



DA-E05
P.267




LDL-645Y13
P.269



LDL-645Z13
P.269



LDL-645T13
P.269



LDL-645U11
P.269




WLED-1906
P.270




WLED-1907
P.270



WLE-1917A
P.271



WLE-1917B
P.271



WLE-1917C
P.271



WLE-1917D
P.271

Recessed wall luminaires





Patent in China, Taiwan, USA and EU.

Features

Unique structure, adjustable lampholder maximizes the lighting range.
 Good thermal management guarantees a long lifespan.
 Precise optical technology creates smooth light distribution and high performance.
 No UV or IR radiation in the light beam.




Application

Used as reading lamp or decorative light in bedroom or hotel rooms.

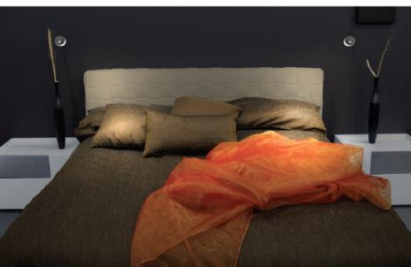

Mounting ring: die-cast aluminium, powder-coated.
 Housing: steel, powder-coated.
 Lampholder: die-cast aluminium, powder-coated.
 Input: AC 100-240V
 LED: OSRAM 3W(700mA)
 Indicat Light: \varnothing 5 LED 0.06W
 LED color: CW NW WW
 Indicator Light color: WH BK SY

DA-E11R-GP-3-15



Indicator lead you the way in darkness.

Flip the luminaire by pushing the indicator sidewill turn on the main lamp.

Rotate the luminaire for reading or light up the wall.

Recessed wall luminaires




Features



Easy installation.
 Various types of products and accessories maximize a variety of space.
 Luminaire can be recessed into the wall or ceiling, suitable for wide range of frames and lamps.

Application

Decorative or guide lighting for museums, exhibitions, art galleries, offices and commercial applications.

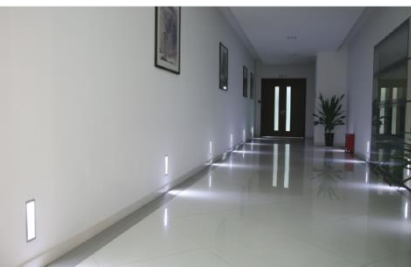


LDL-C01



Mounting frame: die-cast aluminium, powder-coated.
 Lampshade: acrylic, printing.
 Housing: die-cast aluminium, powder-coated.
 LED: OSRAM 1.2W(350mA)
 LED color:
 Color: WH BK SY





SCOOP-90



Mounting frame: die-cast aluminium, powder-coated.
 Lampshade: acrylic, printing.
 Housing: die-cast aluminium, powder-coated.
 LED: OSRAM 1.2W(350mA)
 LED color:
 Color: WH BK SY



LDL-E01



NW: 25cd
 WW: 20cd

Mounting frame: die-cast aluminium, powder-coated.
 Housing: die-cast aluminium, powder-coated.
 Darklight reflector: aluminium, anodized.
 LED: OSRAM 1.2W(350mA)
 LED color:
 Color: WH BK SY