



RECESSED WALL LUMINAIRES



Recessed wall luminaires



Features

IP65.
Clean-cut design
Eco-friendly LED technology along with energy efficiency and free maintenance.
No UV or IR radiation in the light beam.

Application

Decorative lighting for halls, foyers, corridor, hallway, garden, park and commercial applications.



Lamps	Lighting Dimension/Icon/Photometric Curve	parameters
		Cover frame: die-cast aluminium, powder-coated. Lampshade: safety glass. Mounting base: plastic, black. LED: OSRAM 1.2W(350mA) LED color:
		Color: <input type="checkbox"/> WH <input type="checkbox"/> BF <input type="checkbox"/> SY


ODL-C01/LDL-AC16

		Cover frame: aluminium, anodized. Lampshade: safety glass. Mounting base: plastic, black. LED: OSRAM 1.2W(350mA) LED color:
		Color: <input type="checkbox"/> WH <input type="checkbox"/> BF <input type="checkbox"/> SY

ODL-905A/LDL-AC15

		Lampshade: safety glass. Housing: aluminium, powder-coated. Mounting base: plastic, black. LED: OSRAM 1.2W(350mA) LED color:
		Color: <input type="checkbox"/> WH <input type="checkbox"/> BF <input type="checkbox"/> SY

ODL-905A1/LDL-AC15



Recessed wall luminaires



LDL-AC15
Available for ODL-905A
ODL-905A1



LDL-AC16
Available for ODL-C01

Accessories for ODL-905A



DC-AC51
ø90, H:9



DC-AC52
ø90, H:20



DC-AC53
ø90, H:20



DC-AC54
ø90, H:10



DC-AC55
ø90, H:15



DC-AC56
ø90, H:8

Accessories for ODL-905A1



DC-AC60
ø100, H:46




DC-AC61
□100, H:46




DC-AC63
ø150, H:46



DC-AC64
□150, H:46

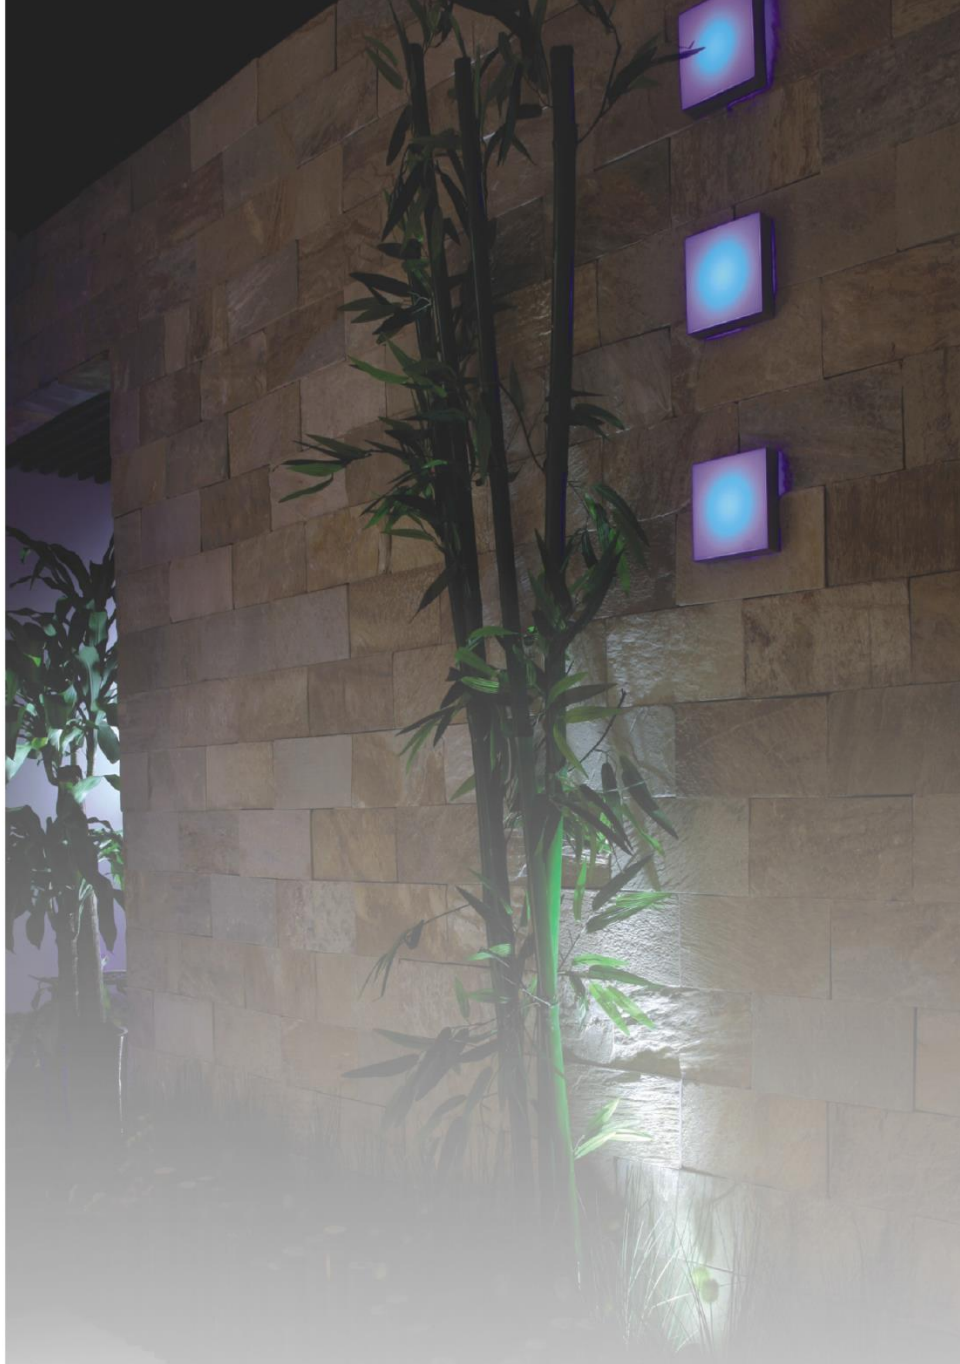

Recessed wall luminaires

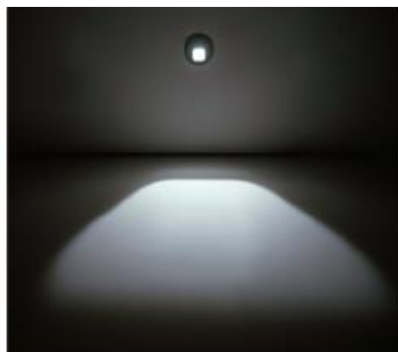

644K11



LED Max 1×3W DC700mA



647D11



LED Max 1×3W DC700mA



644N11



LED Max 1×3W DC700mA



647E11



LED Max 1×3W DC700mA



646Y11



LED Max 1×3W DC700mA

