



Features

- IP65 suitable for the outdoor surroundings.
- KR-104 series have 4 kinds of panels meet various demands.
- Adopting high-quality LED light source offers energy-saving, high power-efficacy, and high color rendering at 82%.
- Optimal thermal management guarantees a long lifespan.
- Special structure with matt glass makes smooth light distribution.
- No UV or IR radiation in the light beam.
- Suitable for a pre-embedded box in the wall, easy to install.

Application

- As the orientation luminaires on the external walls of the building, porches, hallways, corridors, and stairways.



KR-104A
36PCS LED=3W



KR-104B
36PCS LED=3W



KR-104C
36PCS LED=3W



KR-104D
36PCS LED=3W



KR-101A
LED x 1 (700mA)



KR-101B
LED x 1 (700mA)



KR-101C
LED x 1 (700mA)



KR-001A
LED x 1 (700mA)




KR-001B
LED x 1 (700mA)

Installation accessories




AC-104
Materials: steel, electrolytic,
or stainless 403.



75x212
H:70




AC-101C
Materials: plastic, black.




75x215
H:70

Instruction of installation

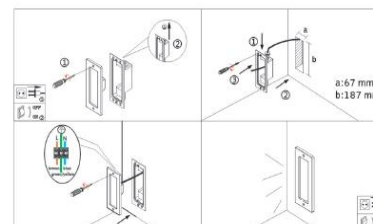


Wooden wall (without installation box, for only KR-104 series)

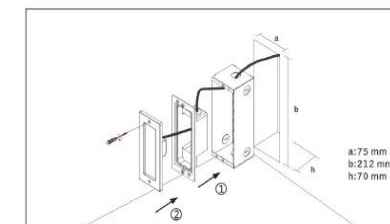

Cement wall (with installation box)



Recessed wall luminaires



Mounting frame: die-casting aluminium, powder-coated, with safety glass.
 Housing: die-cast aluminium, powder-coated.
 Input: AC 100-240V
 LED: OSRAM 0.06W LED 3W/36pcs
 LED color: CW NW WW
 Color: BF SV

KR-104A(36PCS LED=3W)



Available Accessories
 Installation box: AC-104



Mounting frame: die-casting aluminium, powder-coated, with safety glass.
 Housing: die-cast aluminium, powder-coated.
 Input: AC 100-240V
 LED: OSRAM 0.06W LED 3W/36pcs
 LED color: CW NW WW
 Color: BF SV

KR-104D(36PCS LED=3W)



Available Accessories
 Installation box: AC-104



Mounting frame: die-casting aluminium, powder-coated, with safety glass.
 Housing: die-cast aluminium, powder-coated.
 Input: AC 100-240V
 LED: OSRAM 0.06W LED 3W/36pcs
 LED color: CW NW WW
 Color: BF SV

KR-104B(36PCS LED=3W)


Available Accessories
 Installation box: AC-104



Mounting frame: die-casting aluminium, powder-coated, with safety glass.
 Housing: die-cast aluminium, powder-coated.
 Installation box: plastic, black.
 Input: AC 100-240V
 LED: OSRAM LED 1pcs (700mA)
 LED color: CW NW WW
 Color: BF SV

KR-101A



Available Accessories
 Installation box: AC-101B



Mounting frame: die-casting aluminium, powder-coated, with safety glass.
 Housing: die-cast aluminium, powder-coated.
 Input: AC 100-240V
 LED: OSRAM 0.06W LED 3W/36pcs
 LED color: CW NW WW
 Color: BF SV

KR-104C(36PCS LED=3W)

Available Accessories
 Installation box: AC-104




Mounting frame: die-casting aluminium, powder-coated, with safety glass.
 Housing: die-cast aluminium, powder-coated.
 Installation box: plastic, black.
 Input: AC 100-240V
 LED: OSRAM LED 1pcs (700mA)
 LED color: CW NW WW
 Color: BF SV

KR-101B

Available Accessories
 Installation box: AC-101B


Recessed wall luminaires



Mounting frame: die-casting aluminium, powder-coated, with safety glass.
 Housing: die-cast aluminium, powder-coated.
 Installation box: plastic, black.
 Input: AC 100-240V
 LED: OSRAM LED 1pcs (700mA)
 LED color: CW NW WW
 Color: BF SV

KR-101C


■ Available Accessories
 Installation box: AC-101C



Mounting frame: die-casting aluminium, powder-coated, with safety glass.
 Housing: die-cast aluminium, powder-coated.
 Installation box: plastic, black.
 Input: AC 100-240V
 LED: OSRAM LED 1pcs (700mA)
 LED color: CW NW WW
 Color: BF SV

KR-001A

■ Available Accessories
 Installation box: AC-001A



Mounting frame: die-casting aluminium, powder-coated, with safety glass.
 Housing: die-cast aluminium, powder-coated.
 Installation box: plastic, black.
 Input: AC 100-240V
 LED: OSRAM LED 1pcs (700mA)
 LED color: CW NW WW
 Color: BF SV

KR-001B

■ Available Accessories
 Installation box: AC-001A